



FINAL INSPECTION REPORT 1x3 Wavelength Combiner / Splitter (WDM)

Item #: ROB58HA
SN: A000411


Center Wavelength
Blue Port: 488 nm
Orange Port: 594 nm
Red Port: 640 nm
Maximum Optical Power ^a
With Connectors or Bare Fiber: 50 mW
Spliced: 100 mW
Fiber Type: Nufern 460-HP

Test Data at Center Wavelength ^b				
Port Jacket Color	Blue	Orange	Red	
Wavelength	488 nm	594 nm	640 nm	
Transmission ^c	98.40%	95.28%	93.76%	
Insertion Loss ^d	0.07 dB	0.21 dB	0.28 dB	
Isolation ^e	White Port	N/A	49.1 dB	19.7 dB
	Red Port	>50.0 dB	N/A	18.8 dB
	Blue Port	>50.0 dB	22.0 dB	N/A

Test Data over Bandwidth ^b				
Bandwidth	483-493 nm	589-599 nm	635-645 nm	
Transmission ^c	93.1%	91.2%	87.3%	
Insertion Loss ^d	0.31 dB	0.40 dB	0.59 dB	
Isolation ^e	White Port	N/A	14.99 dB	20.42 dB
	Red Port	22.21 dB	N/A	13.36 dB
	Blue Port	15.03 dB	12.85 dB	N/A

- a. Specifies the maximum power allowed through the component. Performance and reliability under high power conditions must be determined within the user's setup.
- b. All values are measured at room temperature without connectors.
- c. Calculated from measured insertion loss data below.
- d. Insertion loss is the ratio of the input power to the output power for each port of the wavelength combiner / splitter (WDM).
- e. Isolation represents the minimum crosstalk between ports.

Verified by: _____

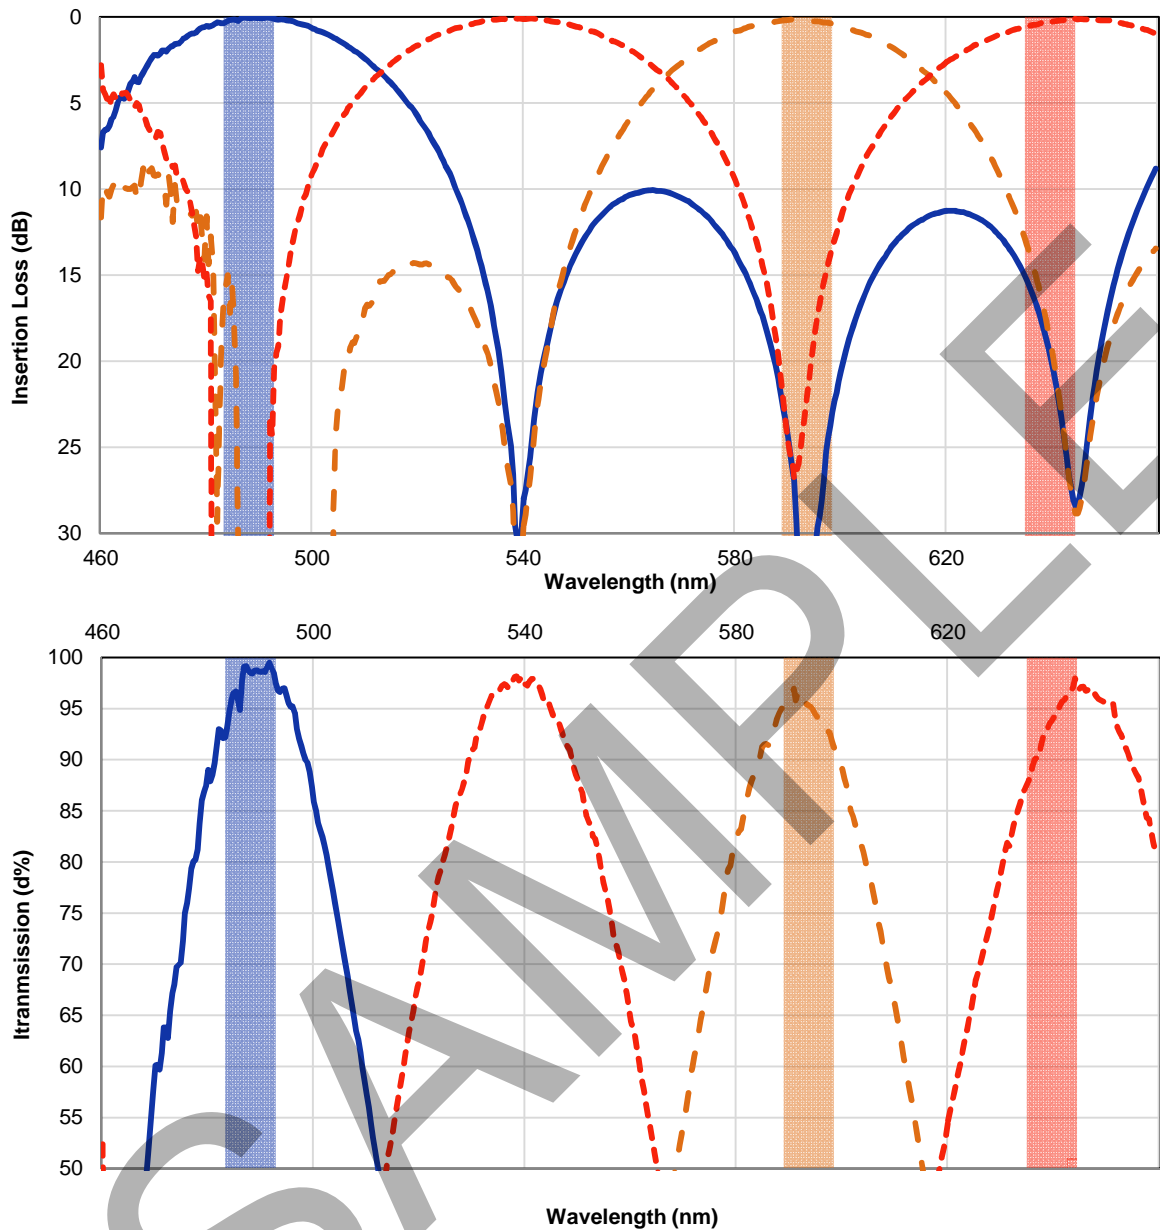

This wavelength combiner / splitter (WDM) operation is only guaranteed over the specified bandwidth as defined by the colored regions above. Thorlabs displays a wider wavelength range to provide insight into how this particular device would perform if used outside its guaranteed operating range. The out-of-band performance can vary from device to device.